

UDC



中华人民共和国国家标准

P

GB 13554

GB 13554-92

High efficiency particulate air filter

()

2008

14

14

14

15

19

21

most penetrating particle size

σ_g

$\leq \sigma_g \leq$

σ_g

3.2

CNC

DEHS

DOP

MPPS

Sebacic acid-bis(2-ethyl-)ester

Phthalic acid-bis(2-ethyl-)ester

di-ethyl-hexyl-sebacate

di-octyl-phthalate


OPC

PSL

a.

b.

c.

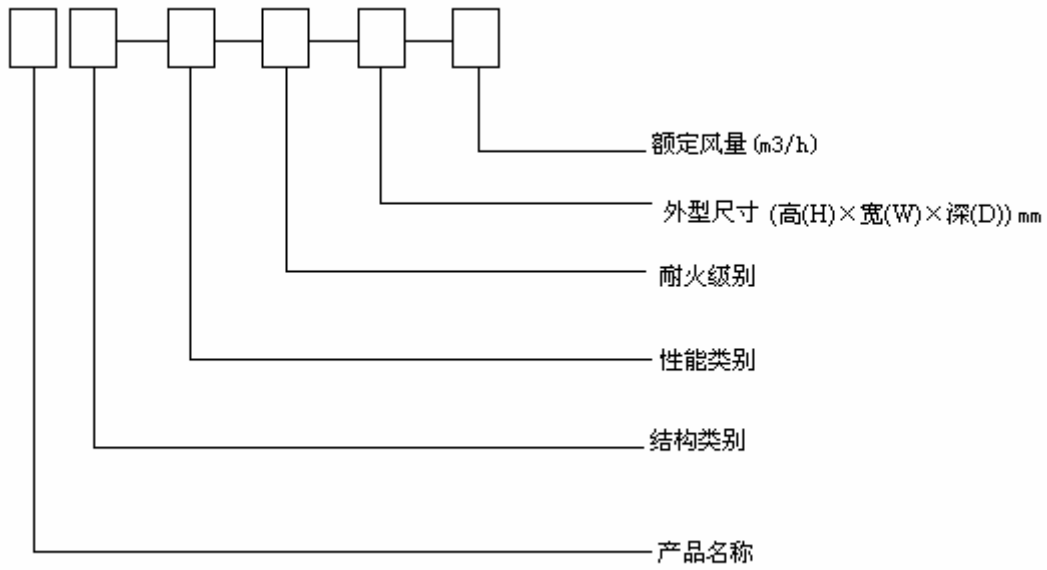


1

4

1			G C
2		4.1	Y
		4.1	W
3		4.2	A B C D E F
4		4.3	1 2 3

GY-A-3-484 484 220-1000 A 99.9%
 3 484 484 220 1000m³/h
 CW-D-2-610 1220 80-2400 D, 99.999%
 2 610 1220 80 2400m³/h
 C

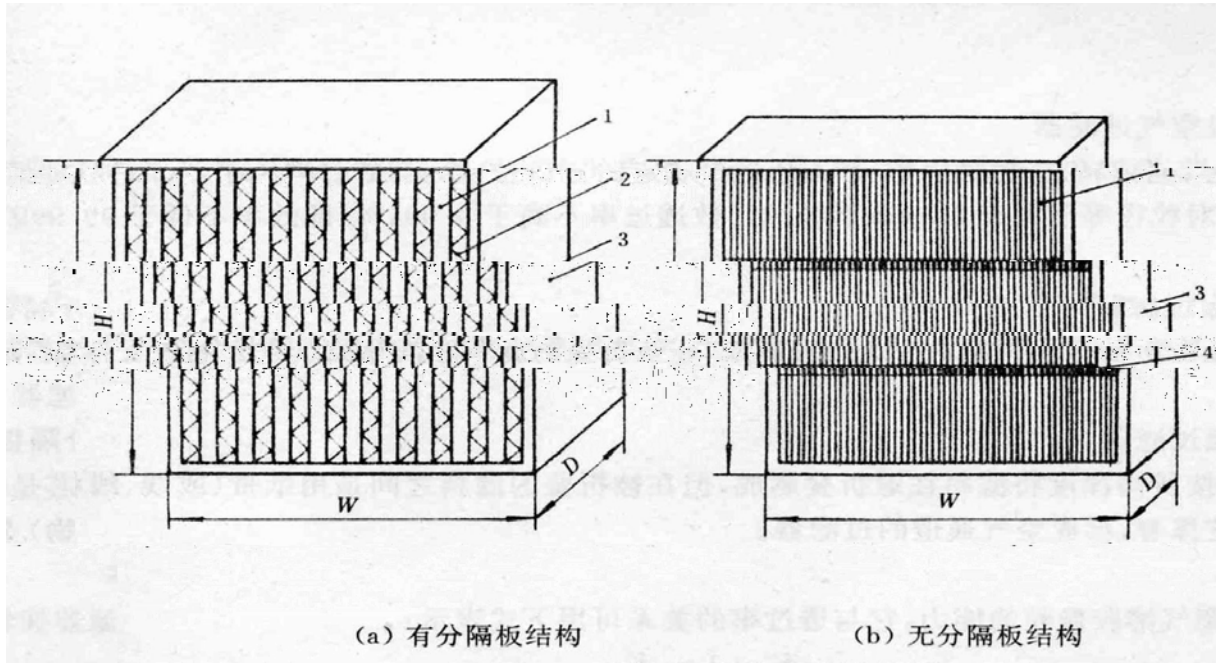

1— 2 3 4

2

5


		0.5 m	
	3	$3 \cdot 10^4$	
		0.1 m	
	3	$3 \cdot 10^6$	

100%

20%


GB/T 4857.10

ISO7

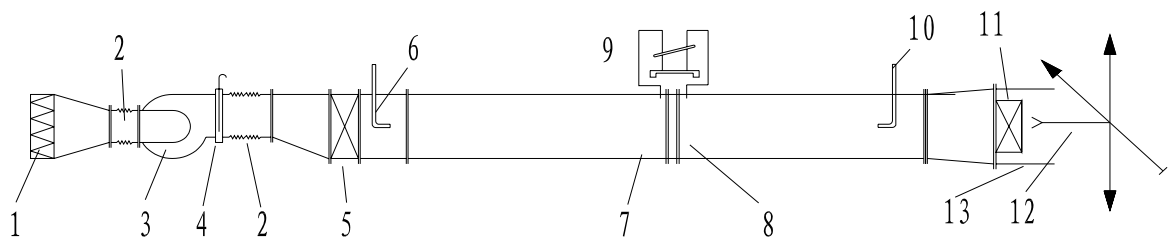

- | | | | | | | | | |
|----|---|----|---|---|----|--|----|--|
| 1— | 2 | 3 | 4 | 5 | | | | |
| 6 | | 7 | 8 | | 9 | | 10 | |
| 11 | | 12 | | | 13 | | | |

A1

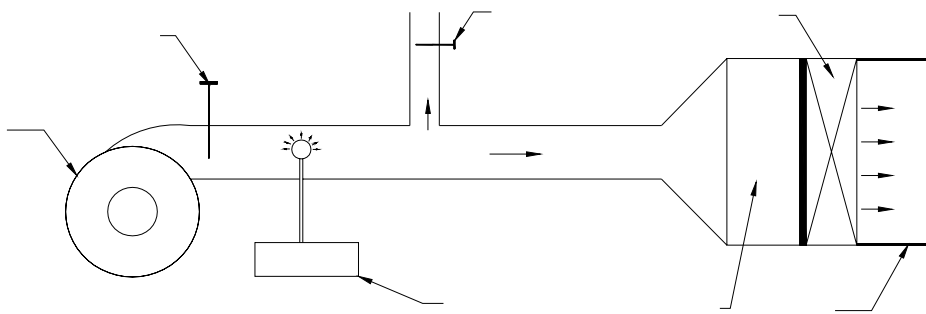

484 484 220
1000m³/h

350Pa

220Pa B

484 484 90

600m³/h